



Putzmeister

Truck-mounted concrete pump BSF 24-4.09 H

Output up to 160 m³/h
Delivery pressure up to 130 bar*



.11 H
.11 H LS
.16 H

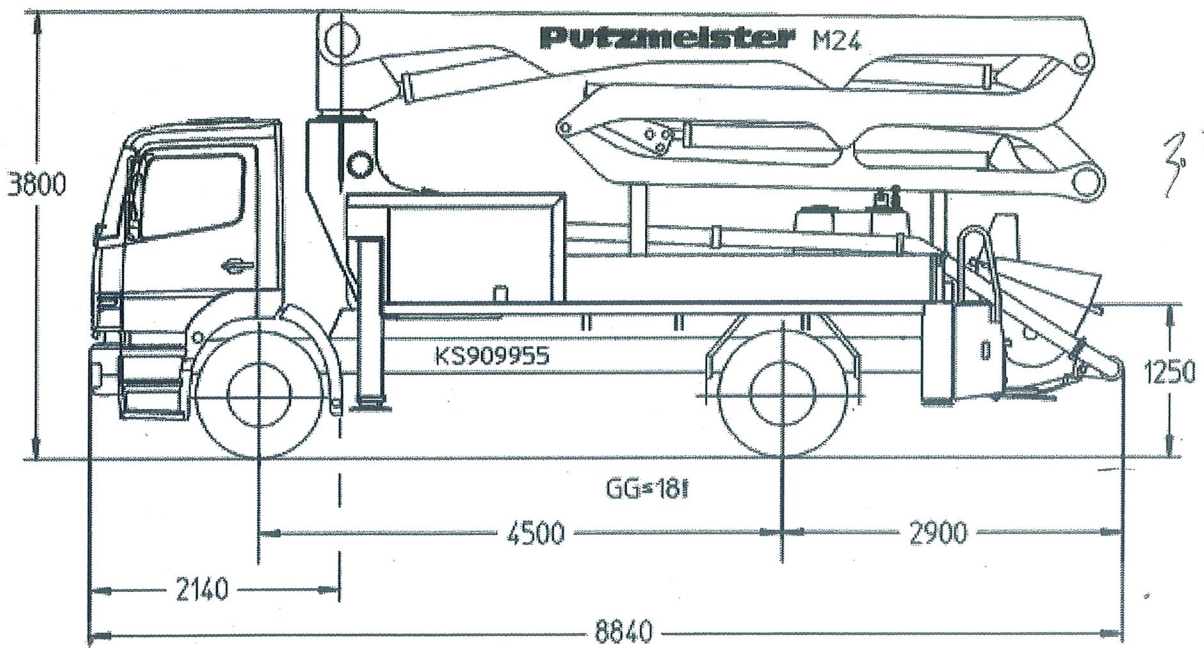



Note: Standard version for .09 H and .11 H (LS). Dimensions and weights depend on truck, pump model and equipment.
Dimensions in mm, MB-Axor 1828 as example.
* For .14 H and .16 H a 3-axle truck is required, gross weight > 18 t.
For illustration only.

Technical data

Truck Length - 29 FT

Boom M 24-4			Pump	BSF	.09 H	.11 H	.11 H L S	16 H	
Sections		4	Rod side	Output	m³/h	-	-	-	160
Reach height		m 23.6		Delivery pressure	bar	-	-	-	85
Horizontal reach	gross	m 65 FT		Strokes	1/min.	-	-	-	31
	net	m 58 FT	Piston side	Output	m³/h	90	110	110	108
Reach depth max.		m 14.5 48 FT		Delivery pressure	bar	78	78	85	130
Unfolding height		m 16 FT		Strokes	1/min.	26	32	27	21
End hose length		m 4		Delivery cylinder	Ø mm	230	230	250	230
Folding system		7R		Stroke	mm	1400	1400	1400	2100

Reach information diagram

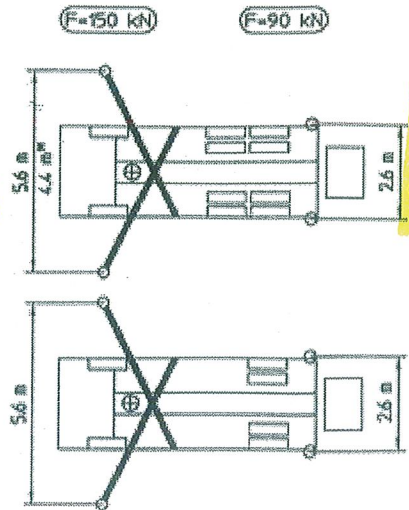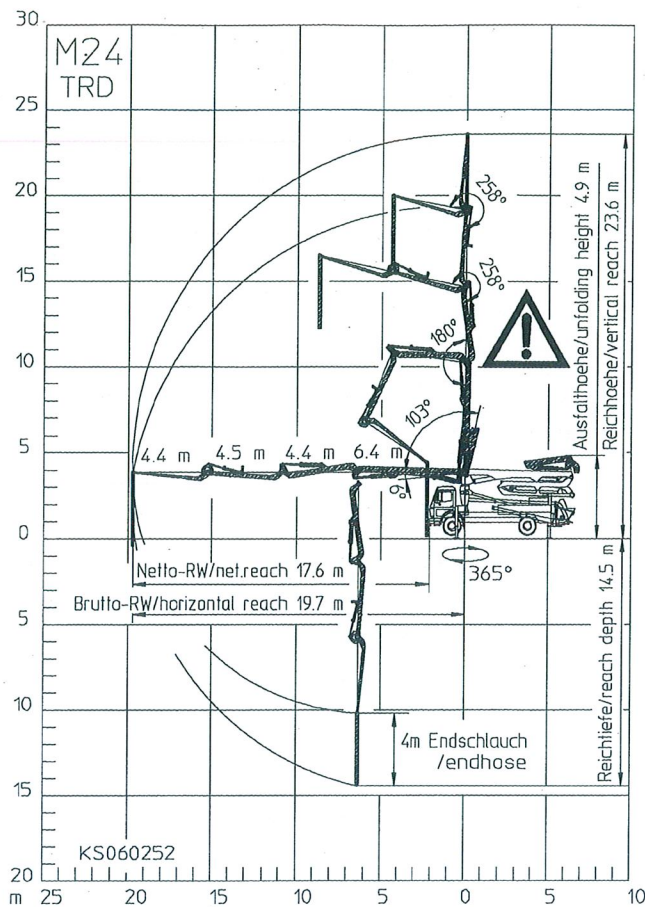

* depends on chassis
Dimensions can differ depending on configuration.

Range in which you must not work with the end hose.

Serial delivery scope

Agitator and water pump radio remote/on site controlled

Cardan shaft maintenance free

Central lubrication strip hopper

Chassis horn via remote control on hopper

Concrete hopper RS 907 with agitator

Connections for hydraulic emergency supply

C-pipe connection for filling water tank

Delivery cylinder chrome-plated

Delivery line (1-layer) PM40, arm assembly

Delivery piston 'compact' (09 H, 11 H, 16 H), 'single' (11 HLS)

Diagnose interface

End hose 4,0 m DN 125 5,5"

Ergonic Graphic Display (EGD) with machine fault management

Ergonic Pump System (EPS) incl. Ergonic Output Control (EOC)

Flushing water pump 160 l/min 25 bar

Hinged elbow with cleaning port

Hydraulic hose for replacement in hose pack

Operating manuals 2 x (1 x paper, 1 x CD-ROM) spare part list

Platform non-skid

Pump on/off dependent on speed

Radio remote control proportional with display

Rear and brake light 24 V

Remote control without display with 25 m cable

Rubber collar on concrete hopper

Side panel left foldable

Side panel right foldable

Spectacle wear plate DURO 22

Splash guard fixed

Spray hose 10 m incl. bracket

S-transfer tube switchover fast/slow

Support plates (4 x) in magazine (2 x) open

Tool set incl. standard equipment

Towing eye

Wash-out port lid with slide pin

Water supply, hopper (1/2")

Water tank 880 / 610 l, depends on core pump

Working light for illumination of hopper, detachable

See quotation for exact serial delivery scope.
Comprehensive range of options available on request.